

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization

International Bureau



(43) International publication date

16 December 2004 (16.12.2004)

PCT

(10) International publication number

WO 2004/109084 A1


- (51) International patent classification<sup>7</sup>: F02K 7/06, 3, Rue des Pacages, F-18570 La Chapelle Saint Ursin (FR).
- (21) International application number: PCT/FR2004/001313 (74) Representative: BONNETAT, Christian; Cabinet Bonnetat, 29 Rue de Saint Petersburg, F-75008 Paris (FR).
- (22) International filing date: 27 May 2004 (27.05.2004)
- (25) Language of filing: French (81) Designated states (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (26) Language of publication: French
- (30) Data relating to the priority: 03/06,489 28 May 2003 (28.05.2003) FR
- (71) Applicant (for all designated States except US): MBDA FRANCE [FR/FR]; 37, Boulevard de Montmorency, F-75016 Paris (FR).
- (72) Inventor; and (84) Designated states (regional): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW).
- (75) Inventor/Applicant (US only): DANIAU, Emeric [FR/FR];

[continued on next page]

As printed

(54) Title: PULSED DETONATION ENGINE

(54) Titre : MOTEUR A DETONATIONS PULSEES

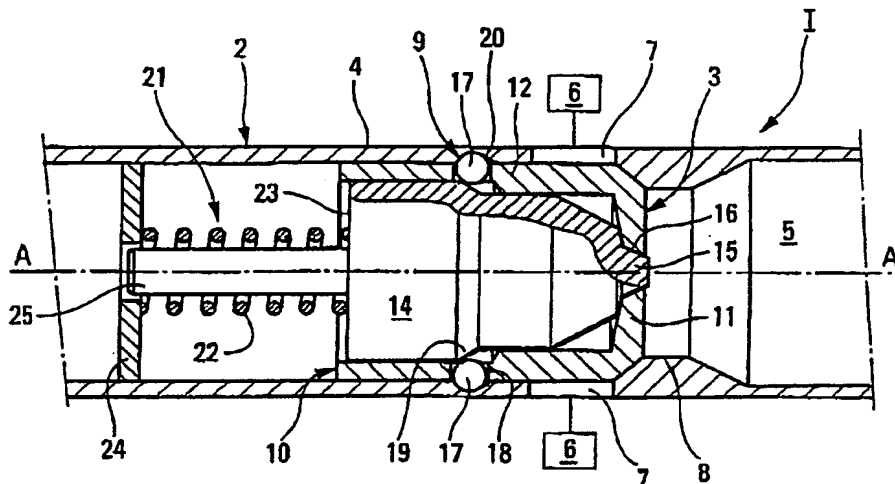

(57) Abstract: The invention relates to a pulsed detonation engine. According to the invention, the transversal base (3) of the flame tube (2) is mounted in such a way that it can move in relation to said tube in order to be able to assume two boundary positions, a first position corresponding to the detonation phase of the combustible charge in the combustion chamber (5) of the tube, and a second position corresponding to the phase wherein the combustible charge is supplied to said chamber. At least one supply opening (7) for the combustible charge is provided in the lateral wall (4) of the tube, said opening being closed and separated from the combustion chamber (5) when the mobile base (3) assumes the first position thereof, and communicating with the chamber (5) in a fluidic manner when the mobile base (3) assumes the second position thereof.

WO 2004/109084 A1

[continued on next page]

ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG, BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For an explanation of the two-letter codes and the other abbreviations, reference is made to the explanations ("Guidance Notes on Codes and Abbreviations") at the beginning of each regular edition of the PCT Gazette.

**Published:**

- With International Search Report.

(57) Abrégé : Selon l'invention, le fond transversal (3) du tube de flamme (2) est monté mobile par rapport à celui-ci pour pouvoir occuper deux positions limites, une première position correspondant à la phase de détonation de la charge combustible dans la chambre de combustion (5) du tube et une seconde position correspondant à la phase d'alimentation de la charge combustible dans ladite chambre, et, dans la paroi latérale (4) du tube, au moins une ouverture d'alimentation (7) de la charge combustible est prévue, qui est obturée et séparée de la chambre de combustion (5) par le fond mobile (3), quand ce dernier occupe sa première position, et qui est en communication fluïdique avec la chambre (5), quand le fond mobile (3) occupe sa seconde position.